




POWER ASPHALT SPRAYERS

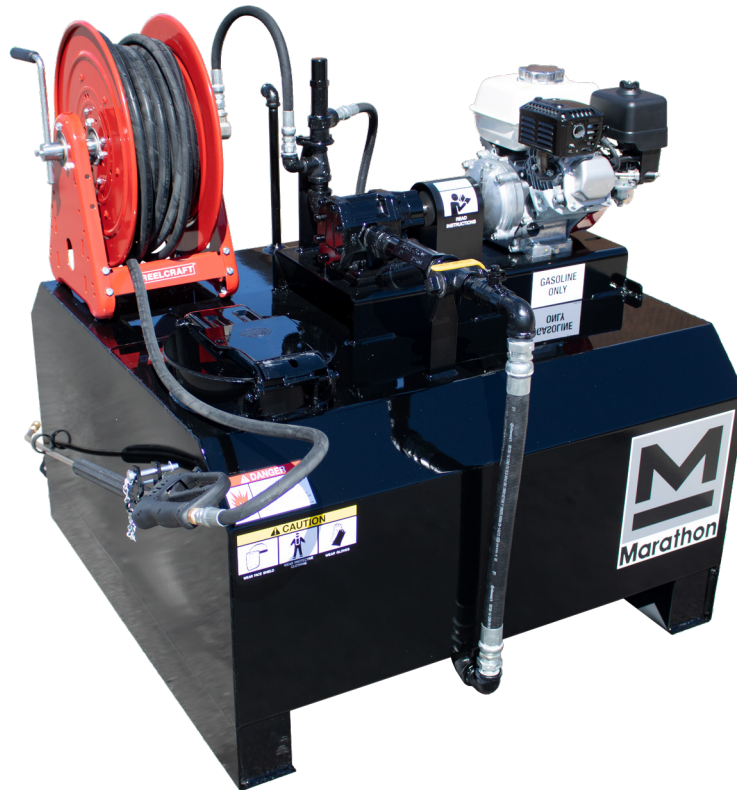

PAS115S

Available sizes: 70 gal | 115 gal | 180 gal | 200 gal

Marathon's asphalt sprayers are designed to spray solvent based sealers, asphalt cutback, gilsonite, foundation coatings and concrete primers. Multiple sizes available, including a portable unit without a material tank, to pump material directly from a drum.

FEATURES

- All units are manufactured with 10 GA steel and exceed all competitive products.
- A 4hp Honda engine, 10 GPM pumping system are standard on all models.
- 5' spray wand with 50' high pressure material hose mounted on a heavy-duty hose reel.
- 10" vented, flip-top filler lids are essential for fast material fill ups.
- 1" drain valve installed on the bottom of material tanks for maintenance.

SPECS

Model	PPAS10	PAS70G	PAS115S	PAS200S
Type	Portable	Skid Mount	Skid Mount	Skid Mount
Material Capacity	N/A	70 gal (265 L)	115 gal (435 L)	200 gal (757 L)
Shipping Weight	150 lbs (68 kg)	336 lbs (152 kg)	450 lbs (204 kg)	670 lbs (304 kg)
Dimensions				
Overall Length	23"	47"	48"	44"
Overall Width	21"	43"	42"	49"
Overall Height	17"	15"	46"	30"
Engine	4hp Honda	4hp Honda	4hp Honda	4hp Honda
Pump Capacity	10 GPM	10 GPM	10 GPM	10 GPM

SPECS

Model	PAS180T
Type	Trailer Mount
Material Capacity	180 gal (681 L)
Shipping Weight	940 lbs (426 kg)
Dimensions	
Overall Length	112"
Overall Width	55"
Overall Height	60"
Engine	4hp Honda
Pump Capacity	10 GPM
Suspension	
Axle(s)	Single
Capacity	3,500 lbs (1,591 kg)
Tires -size	(2) 225/75/R15



CUTBACK EMULSIONS

The most popular types of cutback bitumen are well known as **Rapid Curing (RC)**, **Medium Curing (MC)** and **Slow Curing (SC)**. Rapid Curing cutback is designed to react quickly and are primarily used in spray applications such as bond/tack coats, aggregate chips seals, granular priming and similar surface treatments. Medium Curing cutback is designed to be mixed with aggregates because it does not break immediately upon contact with aggregate, and can remain workable for extended periods of time. Slow Curing cutback are used primarily in road-mixing and dust suppressant applications.